

BOGE C-2 series

Compact. Efficient. Quiet.







A new class of competence

Compact BOGE screw compressors have been known for their reliability in production for many years. The revolutionised and expanded C-2 series lives up to this reputation more than ever — with increased efficiency, greater flexibility and perfect ergonomics, as well as audibly lower noise emissions and much easier maintenance. Your compressed air station can be tailored exactly to your needs — individually configured, yet uniformly compact.

Ergonomic control

The compressor control is positioned – depending on the configuration – on the front plate (on receiver machines) or tilted upwards (on stand-alone machines) to ensure the most ergonomic operation at all times.

Frequency-regulated fan

A frequency control is particularly recommended for fans in the partial load operational range and at low ambient temperatures because it considerably reduces both noise and power consumption. Available as an option from 7.5 kW.

Integrated dryer

An optional refrigerant dryer can be integrated in the casing of all models of the C-2 series. This makes entire compressed air stations possible even in the smallest of spaces, and you can always keep an eye on the dew point display.

Frequency-controlled with direct drive

A frequency control is recommended as it gives you the flexibility to adjust the free air delivery to individual requirements at any time. On all C-2 models, this option is combined with direct coupling to achieve new levels of efficiency.



TECHNICAL DATA

boge.com

Effective sound insulation

All models boast the standard sound insultation hood, which successfully keeps operating noise and vibrations to a minimum. The optional super sound insulation reduces the noise level even further, making it perfect for flexible installation.

Optional heat recovery

BOGE Duotherm offers huge potential for savings: up to 94 percent of the energy used to operate the compressor can be recovered and used for other applications — for example, space heating, domestic water heating or as process water.

Efficiency-optimised airend

An optimised screw profile and the compact design of the airend mean increased free air delivery with minimal power consumption. The C-2 guarantees the perfect airend for every performance class.


Elastic "SilentMount" suspension

An effective way of isolating vibrations, which consequently also lowers the noise level, is to attach the drive motor and the airend elastically to the base frame.




Efficient compressed air station in the smallest of spaces

The C-2 series boasts a wide output range from 2.2 to 22 kW, which means it can offer the perfect solution for every conceivable requirement. Regardless of which options you choose for your application — be it installed on a receiver or with an integrated refrigerant dryer — you will always get a turnkey solution requiring no additional space. No stone is left unturned when it comes to energy efficiency and maintenance.

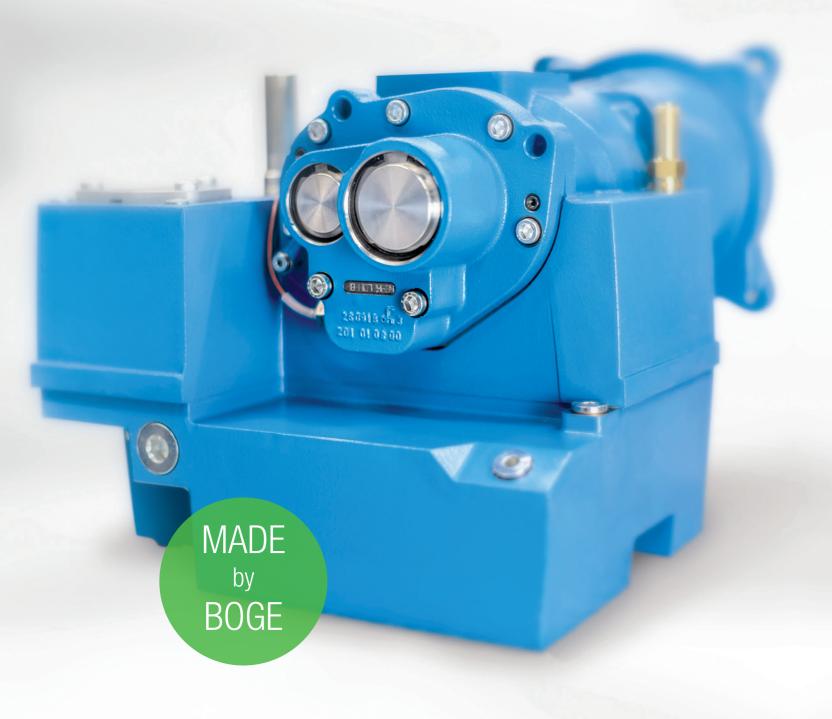

Designed as required

Dryers, IE4 motors or frequency-controlled fans — all of the available options can be fully integrated into the compact casing of the new C-2 series. This even goes for the BOGE Duotherm heat recovery system. And if required, you can of course also order filter packs or an oil/water separator.



Systematic and compact

Whether 2.2 or 22 kW, on a receiver or a standalone machine, belt or direct drive, frequency-controlled or with integrated refrigerant dryer – all of the C-2 models feature a uniform, sound-insulated casing design and can be individually configured for a turnkey compressed air station.



Maintenance-friendly by principle

To ensure the most user-friendly maintenance possible, all of the components have been arranged to allow quick access. For example, all of the sound insulation panels can be effortlessly removed, and filters can be changed with minimal downtime.



A choice of receiver sizes

Our compressed air receivers perform a wide range of roles – from storing the compressed air to separating condensate. For individual customisation, various receiver sizes can be selected across all performance classes – up to 750 I. Machines are available on a receiver continuously from 2.2–22 kW, optionally in AD 2000 and in a galvanised version.



4



Sovereign control like never before

Even the standard base control has everything to allow the new BOGE C-2 to be operated completely autonomously as a turnkey compressed air station — including automatic frost protection mode and integrated leakage monitor. There are also various control options available for coordinating a larger machine network.




Never in the way and always ideally positioned

The ergonomic design of the control panel enables perfect positioning for convenient operation; integrated on the front plate on receiver machines, tilted upwards on standalone machines. The highlight: if you need to open the switch cabinet, you can simply flip it to the side.



For bigger tasks: focus control 2.0

The focus control 2.0 is available as an option or with frequency-controlled machines — a next generation control which can operate up to four rigid and/or frequency-controlled compressors in a network. A toggle between system and compressor-based display and RFID access control are offered here as standard.



Unlimited: Airtelligence provis 3 control

This intelligent, higher-level network control can handle an unlimited number of compressors, compressed air networks and accessory components. Its high-performance control algorithms monitor and control the entire compressed air station — proactively and according to use. The control is operated intuitively with touch commands on the 15.6" display.



The future today: BOGE connect

BOGE connect is your ticket to Industry 4.0: all of the system data and machine details are continuously sent to the BOGE connect portal. The data can be visually displayed on any smart device. The key advantage: BOGE connect independently detects inefficient systems, helps identify optimisation potential and simplifies service.





Compressed air for every quality requirement

Filters for every purity class

The innovative design of BOGE's highly efficient filters guarantees compressed air of the required purity class. High-performance filter materials and the flow-optimised design ensure minimal pressure losses and maximum efficiency. Particles, oil and water aerosols are reliably filtered out. Our activated carbon adsorbers provide even longer service life in oil vapour adsorption.



Dryers for every environment

BOGE offers a whole range of the most diverse compressed air dryers to cater to virtually every requirement. For example, our external refrigerant dryers from the DS-2 family are suitable for a greater compressed air demand or challenging environmental conditions, whereas the refrigeration or heat-regenerating adsorption dryers are designed for particularly dry air and pressure dew points from -40°C to -70°C .



Oil/water separators for every oil

As synthetic oils tend to emulsify in condensate, the conventional method of separating oil and water by gravity is no longer effective. That is why the universal BOGE CC-2 oil/water separators operate with various filter stages to provide dischargeable condensate.



Airficient for maximum flow rates

This innovative aluminium pipe system ensures maximum energy efficiency and consistent compressed air quality: as nothing can oxidise, the pipe cross-section, low differential pressures and maximum flow rates do not change over the entire service life. The aluminium pipes and connectors can be quickly and easily installed with the option of flexible replacement if required without the need for expensive specialist tools.





BOGE

Safety is multifaceted



maintenance agreements to diagnostics tools for effective

compressed air management – our service packages are

customised to your specific requirements. To allow you to

focus on what you do best.

Always on call: our engineers

Whether commissioning, maintenance, repair or inspection — our certified BOGE service engineers around the world are your professional port of call for all technical matters. In addition, our Technical Support is available round the clock — 7 days a week.



5 year warranty: BOGE bestcair

BOGE's bestcair programme gives you five years' guaranteed protection for all replacement parts. This warranty is free for you, and we will provide free replacements immediately for the entire period. Any maintenance required will be performed by certified BOGE service engineers — with original BOGE parts of course.



All inclusive: our cairpacs

Original BOGE parts are tested prior to release for several thousand hours to ensure consistently high system efficiency and to minimise the risk of unplanned machine stoppages.

Regular maintenance with original parts, therefore, protects your investment. Our BOGE cairpac maintenance packages include all the parts required for maintenance and cost less than the sum of the individual parts.



Tailormade: the maintenance agreements

Regular maintenance considerably prolongs the service life of your system. To this end, we offer tailormade service packages – from system inspection and maintenance agreements to a full service agreement, whereby we carry out all work to your compressed air system without exception. We are happy to advise you.



10













Customers in more than 120 countries worldwide trust the BOGE brand. Already in its fourth generation, this family-run company directs all its experience into developing innovative solutions and exceptionally efficient products for the compressed air industry.

Uw dealer voor Zeeland:

KEES MECHIELSEN B.V. Nijverheidsstraat 10 4538 Ax Terneuzen Tel. 0115-619376 www.keesmechielsen.nl info@keesmechielssen.nl

BOGE Compressed Air Systems GmbH & Co. KG

004-EN-BI-0.5-03.2019/d · Technical changes and errors reserved.